

FIRE INNOVATIONS®
Inventive Technology for Fire & Rescue Service



APACHE®

NFPA UL CERTIFIED
CLASS II HARNESS



UL CERTIFIED TO
NFPA 1983: 2017 ED
FLAME RESISTANCE OPTION

HARNESS FEATURES



Manufactured to NFPA 1983 Standards. Class II Harness.



Sized to be donned over the turnout pant.



With the optional adder hook, this harness functions as a ladder belt.



Fits most firefighters, adjustable to his/her waist.

Item: 1101-0051

Apache™ Class II Harness

HIGHLIGHTS

- NFPA FR Class II harness
- 2 NFPA Attachment/Positioning Points
- Auto tightening of leg straps when A-frame is deployed
- 2 rear adjusting buckles that are designed to slide at 2500lbs (shock absorbers)
- O-Ring design to stretch at 3000lbs (shock absorber)
- Break-away at 3000lbs Kevlar strap on the A-Frame (shock absorber)

PRODUCT OVERVIEW

The Apache harness is a certified NFPA 1983:2017 Fire Resistance (FR) Class II harness. The harness is lightweight and self-adjusting. This patented adjusting method is a feature unique to the design.

The Apache harness is constructed with 100% Kevlar® webbing, and comes standard with two attachment point/positioning points for bailout and/or connecting a NFPA ladder hook.


The Apache harness is available in two multi-sized options. Regular fits 28" to 42", large fits up to 54" waists.



Gross adjustment of the harness is done in the back and neatly put away.



When deployed, the harness A-frame raises and leg straps automatically tightens

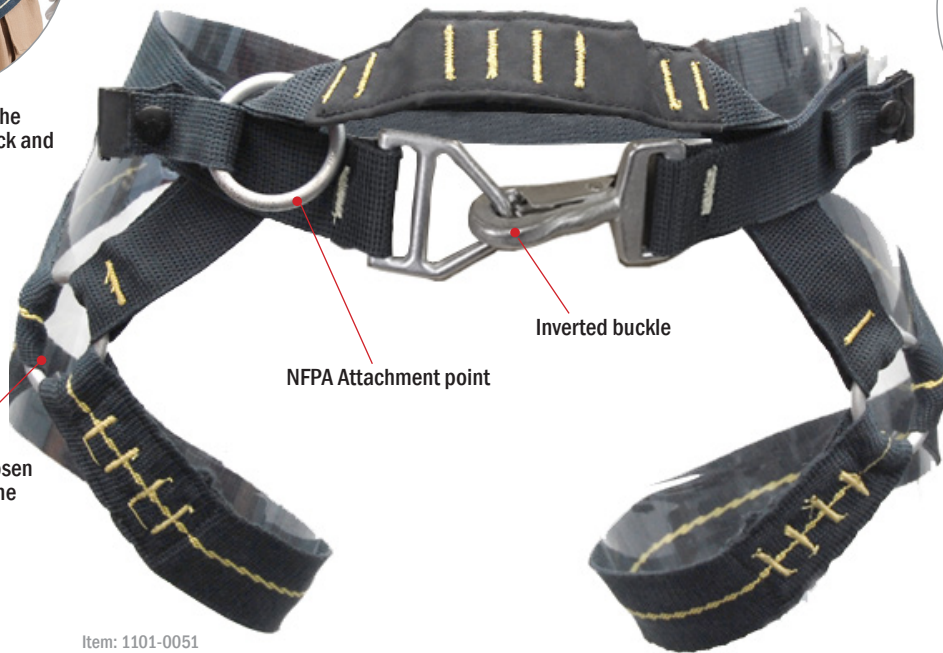

Item: 1101-0051



Optional NFPA Ladder Hook
Item: 1109-2704

SPECIFICATIONS

| | |
|-------------------------|---|
| SKU | 1101-0051 |
| Certification | NFPA 1983: 2017 Edition |
| Department Use | Assigned to individual |
| Donning | Turnout Pant |
| Sizing | From 28 to 54" (71-132cm) |
| NFPA Attachment Points | 2 (A-frame, O-ring) |
| NFPA Positioning Points | 2 |
| Webbing | 1 3/4" Kevlar & 1.5" Kevlar |
| Hardware | Forged Steel (100% Proof Tested 2500lbs+) |
| Weight lbs (Kg) | 1.2lbs (.58Kg) |
| Warranty | 90 Days |
| Country of Manufacturer | United States |

FIRE INNOVATIONS®

NFPA ESCAPE BELTS & HARNESSES

QUICK BELT COMPARISON CHART

| | CHEYENNE | SPOKANE | COMANCHE | MOHAWK | ARAPAHO | APACHE | CREE |
|-----------------------------|----------|---------|----------|--------|---------|--------|------|
| NFPA Escape Belt | ● | ● | ● | ● | ● | ● | ● |
| NFPA Class II Rating | | | | | ● | ● | |
| NFPA Ladder Belt | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| NFPA Flame Resistance | ● | ● | ● | ● | ● | ● | |
| Cobra Frame Buckles | | | | | ● | ● | ● |
| Forged Steel Rated Hardware | ● | ● | ● | ● | | ● | |
| Tool Carrying | ● | | ● | ● | | | |
| Pants | | ● | ● | | ● | ● | ● |
| Coat | ● | | ● | ● | | | |
| Individually Sized | ● | ● | | | | | |
| One-Size-Fits-Most | | | ● | ● | ● | ● | ● |

● Standard ○ Optional Equipment Required

